



120 NE DeBell Suite B
 Bartlesville, OK 74006
 tel. 918-335-3318
 fax. 918-335-3328

Model 4ADI-5DO features...

- ◆ Up to 252 digital inputs, 252 relay outputs, 252 analog inputs and 248 analog outputs per system. Easily configured to route any input to any output.
- ◆ Quickly and easily add wireless I/O to existing systems; compatible with virtually all SCADA systems. Easily expandable in the field to meet future requirements.
- ◆ High reliability industrial grade, wide temperature range components.
- ◆ Fully bi-directional and continuous signal exchange ensures each unit is capable of controlling, monitoring and verifying signals at all other units – continuous, positive verification of correct operation.
- ◆ Out of the box 'Plug and Play' operation, pre-configured for your application. Duplicate remote relays, switches and analog signals without inter-connecting 'wires'.
- ◆ Completely prepackaged solution in a corrosion resistant, NEMA 12 enclosure ready to be installed; requires just power and signal connection for operation. Most applications don't require an external antenna.
- ◆ All units can revert to a known state upon failure or communication loss, either local or remote within seconds.
- ◆ Modbus configuration, monitoring and control built in. RS-232 and RS-485 interfaces standard.
- ◆ LED and additional relay output indicates the system state and verified communication status.
- ◆ Dual power supply standard (115 VAC or 10 to 28 Volts DC).
- ◆ Built in power supply for 4-20mA transducers – no need for an additional power supply.
- ◆ Ultra long range available with a variety of radio options – all fit inside the standard corrosion resistant enclosure.
- ◆ Built in control routines for tank / well control – throw away that unreliable PLC!
- ◆ Several radio options available, low and high power 900MHz ISM band (license free), plus FCC licensed VHF & UHF radios in several power outputs for challenging locations.
- ◆ Fully FCC approved.
- ◆ LED's indicate every input contact state, every output relay state, RF transmit, RF receive and system / Modbus activity.
- ◆ Communicates with 8ADI-9D0 & 2DI-4DO models for additional I/O options.
- ◆ Highest data integrity with encrypted, secure error rejecting data communication.
- ◆ DAQFactory Drivers for easy PC connection, monitoring & control.

Relay • Switch-Contact • Analog • Modbus 485–232
 Send & receive them with...

VHF • UHF • ISM **RFScada**
Wireless Telemetry



RFScada units provide complete, high reliability, long range, bi-directional wireless transmission/reception for remote monitoring and control of discrete signals. The states of four contact or logic level inputs plus four user configurable analog inputs are transmitted from every unit. Each unit also has 5 relay contact outputs. A system comprises 1 to 32 RFScada units, and simple configuration at the factory or in the field allows each output on every unit to

be driven from any input on any unit. Modbus capability, at every unit, is also standard for additional control and monitoring options. Various radio options are available, from low cost license free ISM spread spectrum radios to high power FCC licensed VHF and UHF radios. The RFScada system has many applications in the oil, gas, water, security, wastewater and other industrial fields.




The RFScada units are designed for high reliability applications requiring remote control & monitoring. They provide a very cost effective, alternative solution to overhead cables or underground cables when connecting to equipment in isolated or in-accessible remote locations.

Unlike competing models the RFScada devices maintain continuous, encrypted **bi-directional** communications, for positive verification of correct operation in all units; plus **immediate indication** of control & monitoring status at every unit. No more guesswork or unknowns caused by 'report on exception' and 'one way transmit' type units, which often give no indication in the case of a failure.

Please consult with the factory for customization or additional options.

Download the complete documentation & manuals from the web!!

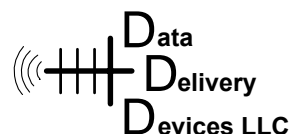


Tel 918-335-3318 Fax 918-398-9990
 internet..... www.datadeliverydevices.com
 email..... info@datadeliverydevices.com

Specifications.....Model 4ADI-5D0

Note: specifications subject to change due to continual product improvements. **SS option shown, SS1, V1, V2, V5, U1, U2, U5 radio specifications differ.**

AC Operating voltage (note 1)	85 - 140 VAC 48 – 62 Hz (85 – 264 VAC 48 – 62Hz if protective MOV changed)
AC Power supply certification (note 1)	UL, CE, CISPR/FCC Class B
DC Input Operating voltage (note 2)	10 to 28 Volts DC
DC Output Power (note 3)	15 Volts DC 1 Amp
AC Power consumption	<0.5 Amp
DC Power consumption (at 12VDC)	0.07 Amp no active relays or 4-20mA; 0.28 Amp with all relays & 4-20mA active
On board AC input fuse rating	2 Amp 115 VAC
AC Input transient protection	Yes, 10,000A 120 Joule 150 V MOV on board
DC Input transient protection	Yes, electronic fuse and 1500W MOV on board
Enclosure rating	UL 508, CSA and NEMA 1,2,3,4,4X,12, 13 IEC 529, IP66
Enclosure type	Fiberglass with stainless steel hardware
Enclosure door closure types	Lockable snap latch or screw close available
Dimensions	11.75 H x 11.75 W x 6.75 D inches
Weight	8 Pounds
Storage temperature rating	-40°C to +85 °C
Operating temperature rating	-30°C to +75 °C (0 to 40 °C for AC powered version)
Humidity	15-95% non-condensing
Minimum telemetry update rate	5 times per second standard (bi-directional)
Transmission method	Bi-directional, mode and modulation type depend on model
Operating frequency	148-174MHz VHF band, 450-490 MHz UHF band, 902-928 MHz ISM band
RF data encryption method	Proprietary 16 bit cyclic redundancy checking with 25 channel hopping
Signal data encryption method	Proprietary rolling code plus 16 bit cyclic redundancy check
Internal antenna supplied	Yes, 2.1 dB Gain omni-directional half wave dipole (ISM)
Range with internal antenna	Up to 14 miles line of sight depending on radio option.
Range with external antenna	Up to 75 miles depending on radio option.
License required (USA)	Not for SS, SS1 versions, yes for V1, V2, V5, U1, U2 and U5 versions
FCC approved	Yes
Network status transmitted	Yes
Units in a network	1 to 32
Maximum number of inputs in a network	504, 252 digital and 252 analog
Maximum number of outputs in a network	500, 252 digital and 248 analog
Output signal source	Any output may be driven by any input, user programmable
Digital Input signal channels transmitted (per unit)	4 plus communication state
Digital Input channel signal type	Low voltage (5V) contacts or logic level
Digital Input signal voltage required	None
Digital Input signal transient protection	Yes, 600W TVS surge and RF filters
Digital Input signal status indication	Yes, on board LED's, one per channel.
Digital Input signal cable length	Maximum 250 feet recommended
Digital Input signal de-bounce time	Approximately 0.25 second
Analog Input channels transmitted (per unit)	4 plus temperature, DC Voltage and radio signal strength (SS1 version)
Analog Input signal type	4-20 mA grounded, 0-5 Volt DC, 0-10 Volt DC jumper selectable.
Analog Input transducer on board power supply	On board 15 VDC with AC power or ~1 Volt below DC supply Voltage.
Transducer on board power supply protection	Yes, current limited with electronic fuse
Analog Input transducer power source	May be external or use on board supply
Analog Input transient protection	Yes, 600W TVS surge and RF filters
Analog Input signal cable length	Max. 250 feet recommended
Analog Input signal accuracy	0.5% (10 bit analog to digital conversion)
Digital output (received) signal channels	4
Digital output (received) status channels	1 for system status
Digital output (received) relay contact ratings	SPDT 10 Amp at 115 VAC, 5 Amp at 30 VDC
Digital output (received) signal indication	Yes, 4 on board LED's, one per channel, show relay states
Digital output (received) system status indication	Yes, on board LED shows system status
Analog 4-20 mA outputs capability	None
Modbus capability	Built in, every unit is a Modbus RTU slave
Modbus interface built in	Yes, both RS-232 and 2 wire RS-485 on board, jumper selectable
Inputs that may be monitored by Modbus	Every analog input, digital input, temperature and DC voltage
Outputs that may be controlled by Modbus	Every analog output and digital output
Time to default outputs after system fail	User adjustable, default is 10 seconds
Additional status LED's	5, two each for data transmission/ reception plus one for Modbus / system activity

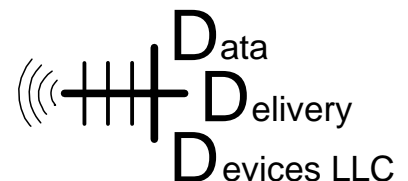

Tel 918-335-3318

Fax 918-398-9990

internet..... www.datadeliverydevices.com

email..... info@datadeliverydevices.com